

FIBER INTERCONNECT PRODUCTS



Aerial Fiber Optic Cable (Max Span : 400m)

Description

- All Dielectric Self Supporting (ADSS) Cable for Aerial Application.
- Black PE jacketed cable is a UV-stabilized, water blocked cable for outdoor aerial applications.
- Anti-tracking Jacket is also available upon request
- Loose tube design provides stable and highly reliable transmission parameters for a variety of voice, data, video and imaging applications.
- High modulus aramid yarns provides high tensile strength and long term reliability.

Applications

- Low-voltage transmission and distribution System
- Space potential ≤ 12 kV (with PE Jacket), ≤ 24 kV (with Anti-Tracking Jacket)
- Railways and Telecommunications pole route.
- Suitable for all type of aerial lines.

Specifications

- IEC 60793 / IEC 60794, ITU-T G652D
- IEEE P1222, Telcordia GR-20-CORE



Color Identification

01 - Blue	05 - Slate	09 - Yellow
02 - Orange	06 - White	10 - Violet
03 - Green	07 - Red	11 - Rose
04 - Brown	08 - Black	12 - Aqua

Mechanical Characteristics

Storage Temperature : -40 to +70°C / Operating Temperature : -20 to +60°C

Fiber Count	Nominal* Outer diameter		Nominal* Weight		Maximum Tensile Load				Crush Load				Minimum Bend Radius			
	[mm]	[inch]	[kg/km]	[lb/1000 ft]	Short Term [N]	Short Term [lb]	Long Term [N]	Long Term [lb]	Short Term [N/cm]	Short Term [lb/inch]	Long Term [N/cm]	Long Term [lb/inch]	Loaded [cm]	Installed [inch]	Loaded [cm]	Installed [inch]
6	14.0	0.55	150	101	2,700	125	220	125	220	125	110	63	28.0	11.02	14.0	5.51
12	14.0	0.55	150	101	2,700	125	220	125	220	125	110	63	28.0	11.02	14.0	5.51
24	14.0	0.55	150	101	2,700	125	220	125	220	125	110	63	28.0	11.02	14.0	5.51
36	14.0	0.55	150	101	2,700	125	220	125	220	125	110	63	28.0	11.02	14.0	5.51
48	14.0	0.55	150	101	2,700	125	220	125	220	125	110	63	28.0	11.02	14.0	5.51
72	14.0	0.55	150	101	2,700	125	220	125	220	125	110	63	28.0	11.02	14.0	5.51
96	15.4	0.61	180	121	2,700	125	220	125	220	125	110	63	30.8	12.13	15.4	6.06

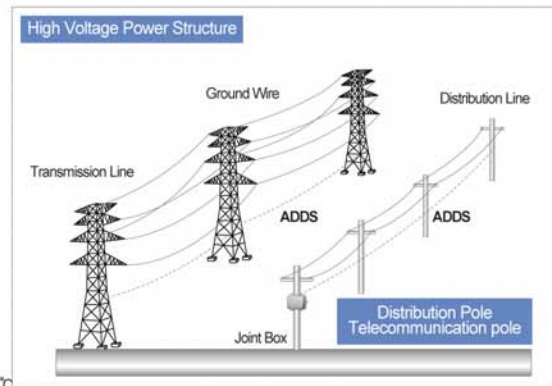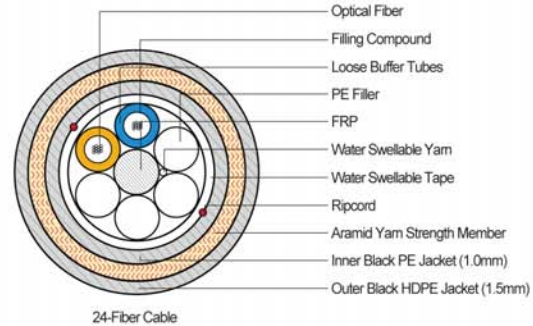

Transmission Performance 1310nm/ 1550nm

Max. Attenuation	(dB/km)	0.35 / 0.25
Max. Dispersion	(ps/nm-km)	3.5 / 18
Max. PMD	(ps/√ km)	0.2
Max. Field Diameter	(um)	92± 0.4/105±1.0

Ordering Information

FC-OS1-MLT-ADSS4-YYY-LZ
FC-OS1-MLT-ADSS4-YYY-PE

YYY : Number of Cores

Standard Reel Length	4000m
----------------------	-------

*Other Cable lengths may be available upon request

Loading / Sag Estimation

Items	Unit	Loading Estimation				
		6-72		96		
Fiber Counts	-	Medium	Light	Medium	Light	
NFSC Condition Code	-	400	450	400	440	
Maximum Span Length	m	400	450	400	440	
Installation	Load	kg(lb)	503	566	604	664
	Sag	m(ft)	6.0	6.8	6.0	6.6
Every Day Stress	Load	kg(lb)	496	558	594	654
	Sag	m(ft)	6.1	6.9	6.1	6.7
Max. Operating Stress	Load	kg(lb)	1061	1057	1200	1192
	Sag	m(ft)	14.1	15.2	13.5	14.2
Max. Sag	Vertical	m(ft)	14.0	10.0	13.6	9.8
	Horizontal	m(ft)	10.0	16.6	9.4	15.6

Headquarters	Regional Office – West	Regional Office – East	Canada	United Kingdom	UAE	India
4511 Singer Court, Suite 201 Chantilly, VA 20151 Ph: +1 703 653 1100, Fax: +1 703 803 8319	373 E Vintage Park Drive, Foster City, California 94404 Ph: +1 650 212 3456	1900 AM Drive, Suite 101 Quakertown, PA 18951 Ph: +1 215 538 8700 Fax: +1 215 538 8789	155 Terence Mathews Crescent Unit 5, Kanata, Ottawa Ontario K2M 2A8, Canada Ph: +1 613-599-9754 Fax: +1 613-599-9614	Witan Court, 305 Upper Fourth Street, Milton Keynes, MK9 1EH United Kingdom Ph: +44(0) 2031 301 710	Opterna MEA Fz Co. PO Box 293862 B14 Airport Free Zone, UAE Ph: +971 42997676	Plot No. 2, Corporate Office Cochin Special Economic Zone Kakkanad, Kochi – 682 037 Ph: +91-484-2413223/2413224