

FIBER INTERCONNECT PRODUCTS



Aerial Fiber Optic Cable (Max Span :100m)

Description / Applications

- All Dielectric Self Supporting (ADSS) Cable for Aerial Application.
- Black PE jacketed cable is a UV-stabilized, water blocked cable for outdoor aerial applications.
- Loose tube design provides stable and highly reliable transmission parameters for a variety of voice, data, video and imaging applications.
- High modulus aramid yarns provides high tensile strength and long term reliability.

Applications


- Low-voltage transmission and distribution System (Space potential \leq 12 kV)
- Railways and Telecommunications pole route.
- Suitable for all type of aerial lines

Specifications


- IEC 60793 / IEC 60794, ITU-T G652D
- Telcordia GR-20-CORE, IEEE 1222

Color Identification

01 - Blue	05 - Slate	09 - Yellow
02 - Orange	06 - White	10 - Violet
03 - Green	07 - Red	11 - Pink
04 - Brown	08 - Black	12 - Aqua

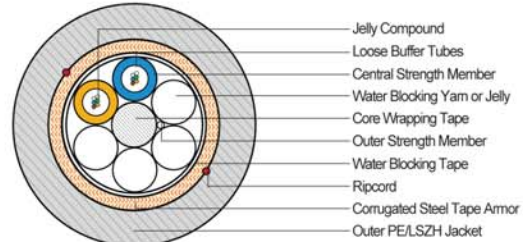

12-Fiber Cable

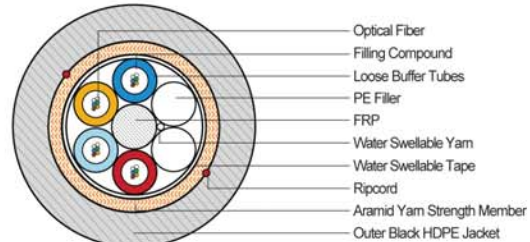

48-Fiber Cable

Mechanical Characteristics

Storage Temperature : -40 to + 80°C / Operating Temperature : -30 to + 70°C

Fiber Count	Nominal* Outer diameter		Nominal* Weight		Crush Load				Minimum Bend Radius Loaded		Minimum Bend Radius Installed	
	[mm]	[inch]	[kg/km]	[lb/1000 ft]	Short Term [N/cm]	Long Term [N/cm]	Short Term [lb/inch]	Long Term [lb/inch]	[cm]	[inch]	[cm]	[inch]
6	11.3	0.44	96	64	220	125	110	63	22.6	8.90	11.3	4.45
12	11.3	0.44	96	64	220	125	110	63	22.6	8.90	11.3	4.45
24	11.3	0.44	96	64	220	125	110	63	22.6	8.90	11.3	4.45
36	11.3	0.44	96	64	220	125	110	63	22.6	8.90	11.3	4.45
48	12.0	0.47	105	70	220	125	110	63	24.0	9.45	12.0	4.72
72	12.0	0.47	105	70	220	125	110	63	24.0	9.45	12.0	4.72

Transmission Performance ^{1310nm/ 1550nm}

Max. Attenuation	(dB/km)	0.35 / 0.25
Max. Dispersion	(ps/nm-km)	3.5 / 18
Max. PMD	(ps/√ km)	0.2
Max. Field Diameter	(um)	92± 0.4/10.5±1.0

Loading / Sag Estimation

Items	Unit	Loading Estimation		
NESC Condition Code	-	Light		
Fiber Counts	-	6~36	48~72	
Installation	Load	kg(lb)	120 (264)	132 (290)
	Sag	m(ft)	1.0 (3.3)	1.0 (3.3)
Every Day Stress	Load	kg(lb)	111 (244)	123 (271)
	Sag	m(ft)	1.1 (3.6)	1.1 (3.6)
Max. Operating Stress	Load	kg(lb)	312 (687)	333 (733)
	Sag	m(ft)	4.0 (13.2)	3.9 (12.8)
Max. Sag	Vertical	m(ft)	2.1 (6.9)	2.1 (6.9)
	Horizontal	m(ft)	4.3 (14.1)	4.3 (14.1)
Max. Survival Wind Speed	km/hr	150		

Ordering Information

FC-OS1-MLT-ADSS1-YYY-LZ
FC-OS1-MLT-ADSS1-YYY-PE

YYY : Number of Cores

Standard Reel Length	4000m
----------------------	-------

*Other Cable lengths may be available upon request

Headquarters	Regional Office – West	Regional Office – East	Canada	United Kingdom	UAE	India
4511 Singer Court, Suite 201 Chantilly, VA 20151 Ph: +1 703 653 1100, Fax: +1 703 803 8319	373 E Vintage Park Drive, Foster City, California 94404 Ph: +1 650 212 3456	1900 AM Drive, Suite 101 Quakertown, PA 18951 Ph: +1 215 538 8700 Fax: +1 215 538 8789	155 Terence Mathews Crescent Unit 5, Kanata, Ottawa Ontario K2M 2A8, Canada Ph: +1 613-599-9754 Fax: +1 613-599-9614	Witan Court, 305 Upper Fourth Street, Milton Keynes, MK9 1EH, United Kingdom Ph: +44(0) 2031 301 710	Opterna MEA Fz Co. PO Box 293862 B14 Airport Free Zone, UAE Ph: +971 42997676	Plot No. 2, Corporate Office Cochin Special Economic Zone Kakkanad, Kochi – 682 037 Ph: +91-484-2413223/2413224