




## Fiber Optic Drop Cable - Outdoor

Opterna outdoor drop cable is constructed with two singlemode fibre (ITU-T G652D) protected by dielectric strength member made of fibreglass reinforced plastic (FRP), steel wire and a LSZH outer jacket.

Utilising a 250mm fibre, the cable unit is suitable for use with industry standard connector.

### Features & Advantages

- ❖ Robust and lightweight.
- ❖ Colour coded fibres for easy identification.
- ❖ Standard cable length of 2 Km.

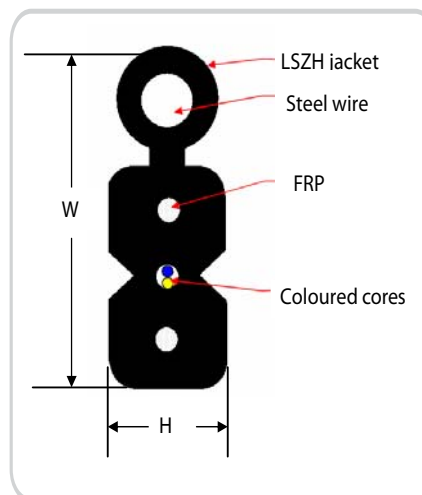

### Color Identifications

01- Blue      02- Orange

### Mechanical Characteristics

Storage Temperature	-30 to 70°C
Operating Temperature	-20 to 60°C
Fire Performance	IEC 60332-1,3

### Cable Construction

Primary coating with colour layer	250±15 µm
Dielectric strength member	FRP
Outer Jacket	LSZH

Fiber Count	Diameter	Weight	Maximum Tensile Load		Minimum Bend Radius	
			Short Term	Long Term	Loaded	Installed
2	5.0 mm(W) x 2.0mm(H)	20 Kg/Km	600N	200N	20 mm	40 mm

### Ordering Information

FCOS1DRPSW-002LZ	Single-Mode 2 Core Outdoor Drop cable, LSZH
------------------	---

Headquarters:	Canada	United Kingdom	UAE	India
4511 Singer Court, Suite 201 Chantilly, VA 20151 Ph: +1 703 653 1100, Fax: +1 703 803 8319	155 Terence Mathews Crescent Unit 5, Kanata, Ottawa Ontario K2M 2A8, Canada Ph: +1 613-599-9754 Fax: +1 613-599-9614	Witan Court, 305 Upper Fourth Street, Milton Keynes, MK9 1EH. United Kingdom Ph: +44(0) 2031 301 710	Opterna MEA Fz Co. PO Box 293862 B14 Airport Free Zone, UAE Ph: +971 42997676	Plot No. 2, Corporate Office Cochin Special Economic Zone Kakkanad, Kochi – 682 037 Ph: +91-484-2413223/2413224
Regional Office – West 373 E Vintage Park Drive, Foster City, California 94404 Ph: +1 650 212 3456	Regional Office – East 1900 AM Drive, Suite 101 Quakertown, PA 18951 Ph: +1 215 538 8700 Fax: +1 215 538 8789			